

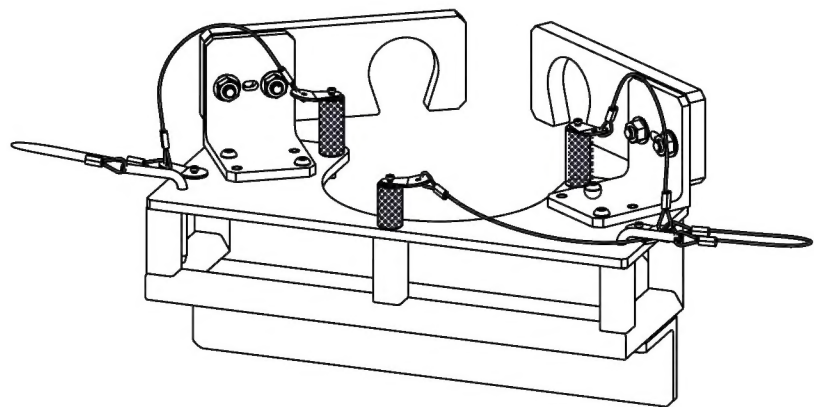


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.


REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	10/18/2016	DPD	JAG

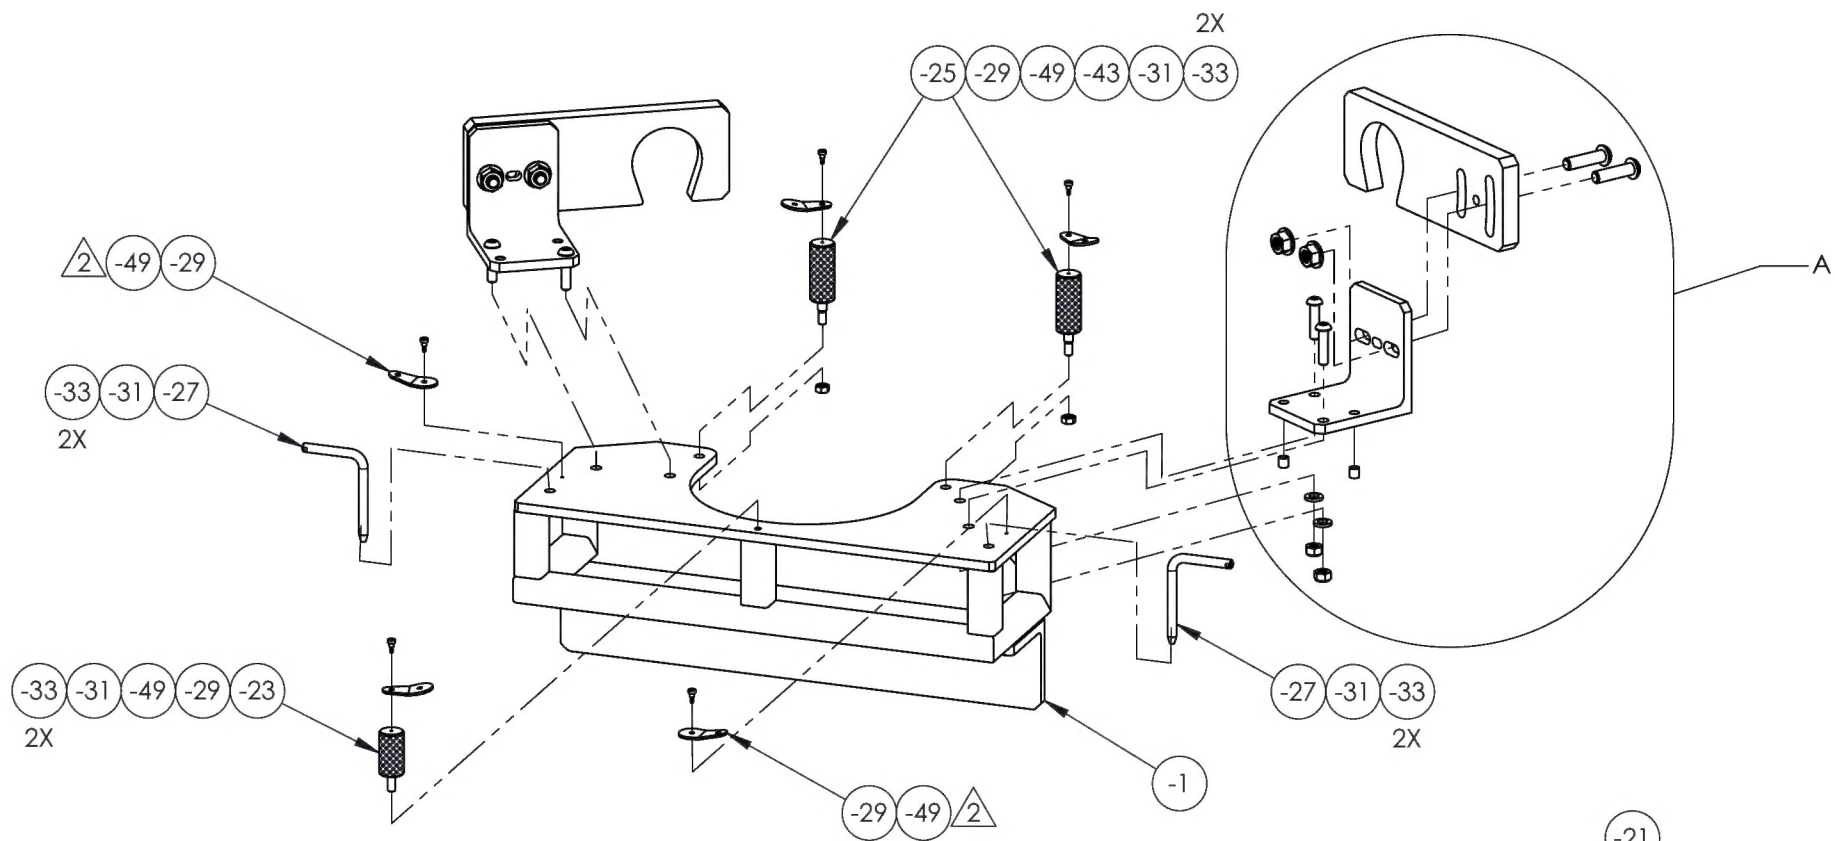

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
	X		-1	1	FRAME WELDMENT			2
	1		-3		ANGLE BAR	A36/1018/1020 HR		3
	1		-5		LONG TUBE	STEEL TUBE		4
	1		-7		RIGHT SIDE TUBE	STEEL TUBE		5
	1		-9		LEFT SIDE TUBE	STEEL TUBE		6
	2		-11		UPRIGHT ANGLED	STEEL TUBE		7
	3		-13		UPRIGHT SQUARE	STEEL TUBE		8
	2		-15		GUSSET	A36/1018/1020 HR		9
	1		-17		MAIN PLATE	A36/1018/1020 HR		10
			-19	2	ANGLE BRACKET	A36/1018/1020 HR		11
			-21	2	PLATE	6061		12
			-23	1	SHORT THUMB SCREW	4140/4142		13
			-25	2	LONG THUMB SCREW	4140/4142		14
			-27	2	BENT HANDLE PIN	1018/1020 CR		15
		B/O	-35	4	SLOTTED UNTHREADED SPACER	STEEL	Ø.198 I.D. X Ø.255 X 1/4 (MCMASTER-CARR #93441A170)	1
		B/O	-37	4	BUTTON HEAD SOCKET CAP SCREW	STEEL	M6 X 1mm X 25mm (MCMASTER-CARR #91306A674)	1
		B/O	-39	4	WASHER	STEEL	M6 (MCMASTER-CARR #91166A250)	1
		B/O	-41	4	NYLON INSERT LOCKNUT	STEEL	M6 X 1mm (MCMASTER-CARR #90576A115)	1
		B/O	-29	5	CABLE TAB	ALUMINUM	(CARR LANE #CL-129-TAB-A)	1
		B/O	-43	2	HEX NUT	STEEL	M5 X 0.8mm (MCMASTER-CARR #90591A260)	1
		B/O	-45	4	BUTTON HEAD SOCKET CAP SCREW	STEEL	M8 X 1.25mm X 30mm (MCMASTER-CARR #91352A156)	1
		B/O	-47	4	SERRATED FLANGE LOCKNUT	STEEL	M8 X 1.25mm (MCMASTER-CARR #96194A102)	1
		B/O	-49	5	SHOULDER SCREW	S.S.	M2 X 0.4mm X 4mm, Ø3mm X 3mm (MCMASTER-CARR #90263A112)	1
		B/O	-31	5	LANYARD	COATED STEEL	Ø1/16 X 8 (CARR LANE #CL-2-C)	1
		B/O	-33	10	FERRULE	ALUMINUM	Ø1/16 X 3/8 (MCMASTER-CARR #3896T31)	1
	ASSY -1							

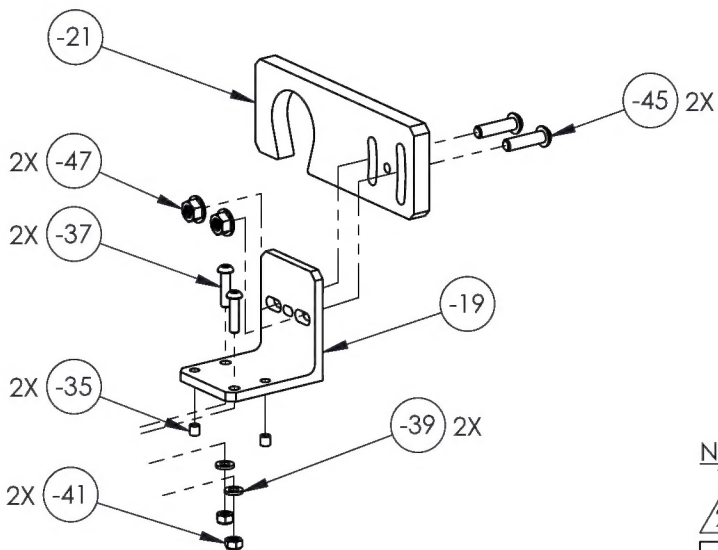







NOTES:
1. REF. AIRBUS T/N: M262V3000101.
2. ATTACHMENT FOR LANYARDS.

			
TITLE EXTINGUISHING BOTTLE SUPPORT			
DWG NO. RBEM262V3000101			REV 1
MAT'L		UNLESS OTHERWISE SPECIFIED	
HEAT		DIMENSIONS ARE IN INCHES	
TREAT		.XXX ± .005 FRACTIONS ± 1/8	
FINISH		.XX ± .01 ANGLES ± 5°	
SPEC		.X ± .1 SURFACES = 125/✓	
DRAWN BY: DUERFELDT		1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	
CHECKED: CLOUGH		2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
OPPS APPR: ANDERSON		3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
QA APPR: LINDSAY		USED ON MODEL	
APPROVED: GILBERT		H175	
SCALE 1:5	DATE 6/20/2016	SHEET 1 OF 15	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED

INK STAMP T/N, S/N,
"MADE IN USA"

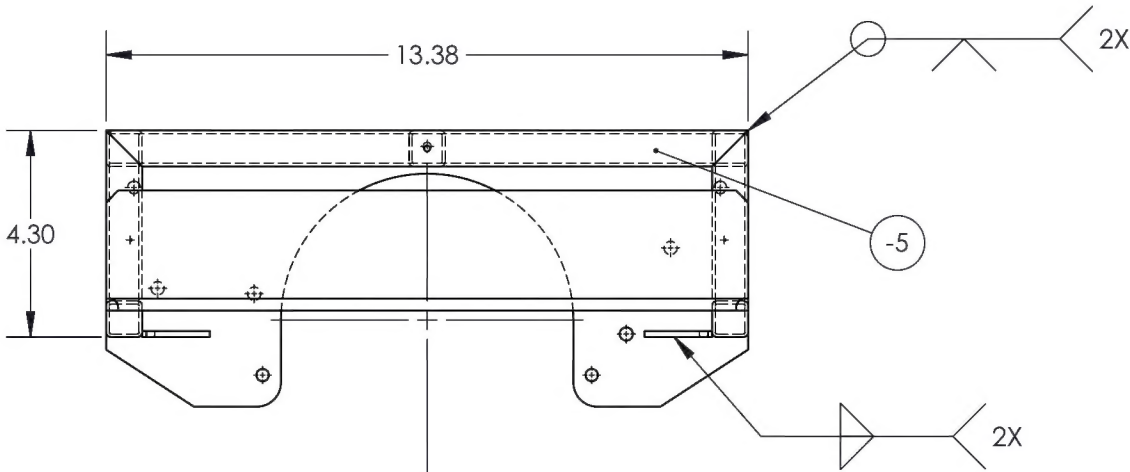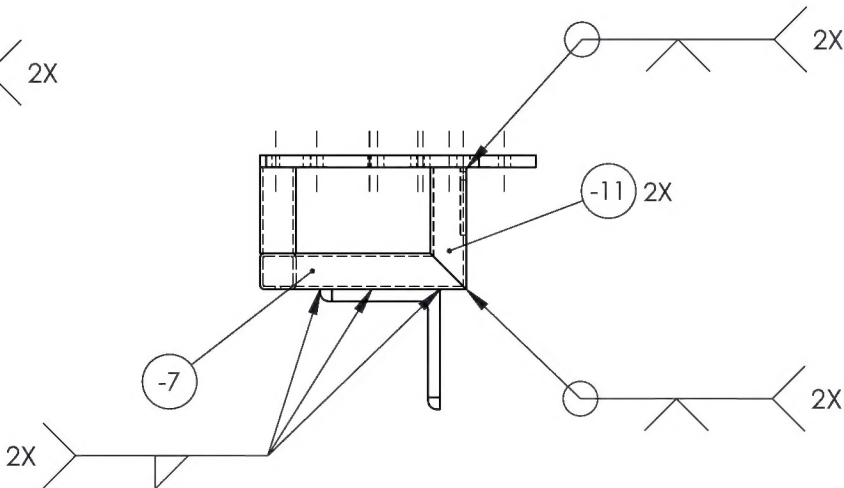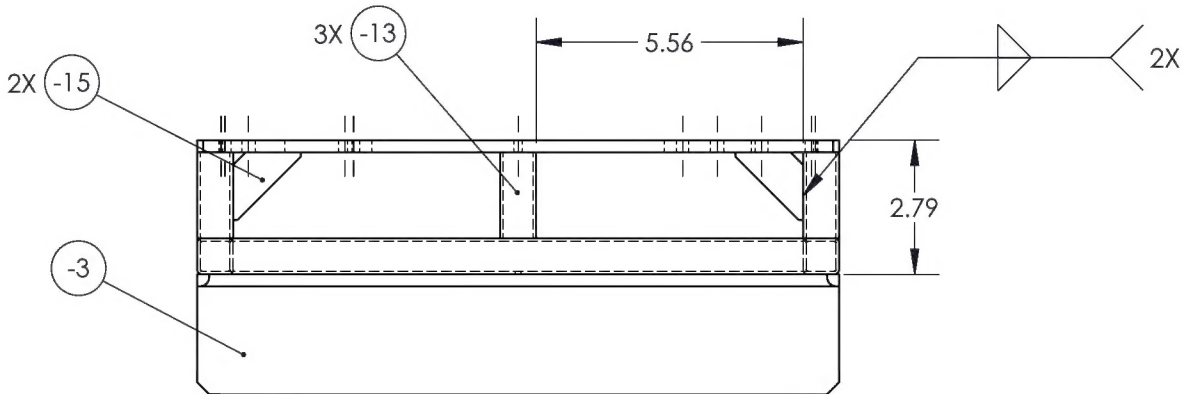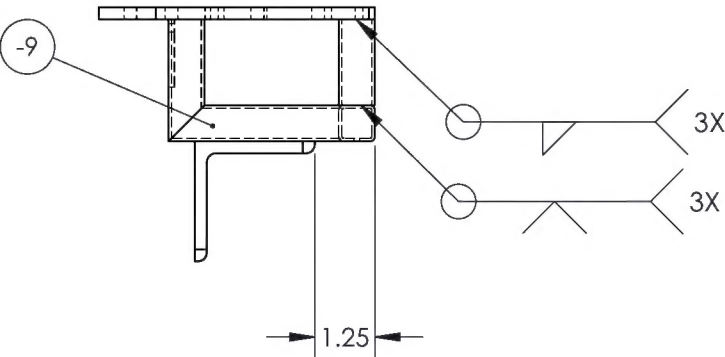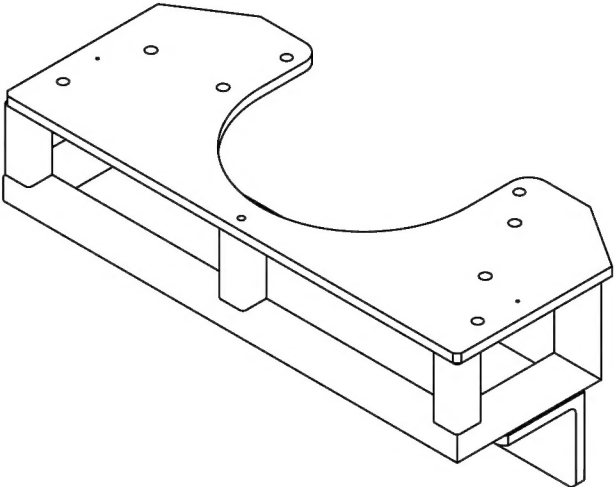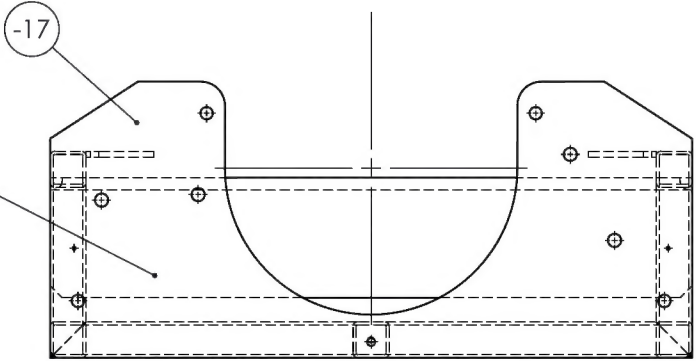

-1




FRAME WELDMENT

NOTE:
NO POWDER COAT IN THREADED HOLES.

DART AEROSPACE			
TITLE EXTINGUISHING BOTTLE SUPPORT			
DWG NO. RBEM262V3000101-1			REV 1
MAT'L HEAT TREAT FINISH POWDER COAT YELLOW SPEC FED #13538		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .010 FRACTIONS ± 1/8 .XX ± .03 ANGLES ± 1° .X ± .1 SURFACES = 125/	
DRAWN BY: DUERFELDT		1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	
CHECKED: CLOUGH		2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
OPPS APPR: ANDERSON		3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
QA APPR: LINDSAY		USED ON MODEL	
APPROVED: GILBERT		H175	
SCALE 1:4	DATE 6/20/2016	SHEET 2 OF 15	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS						
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED	

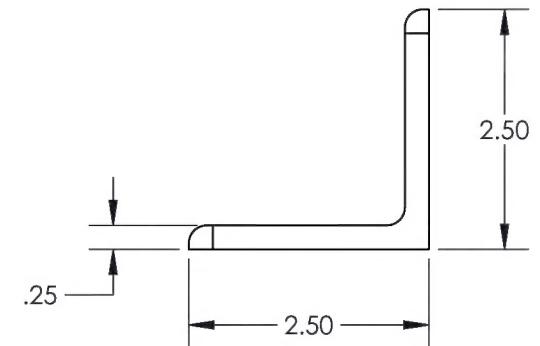
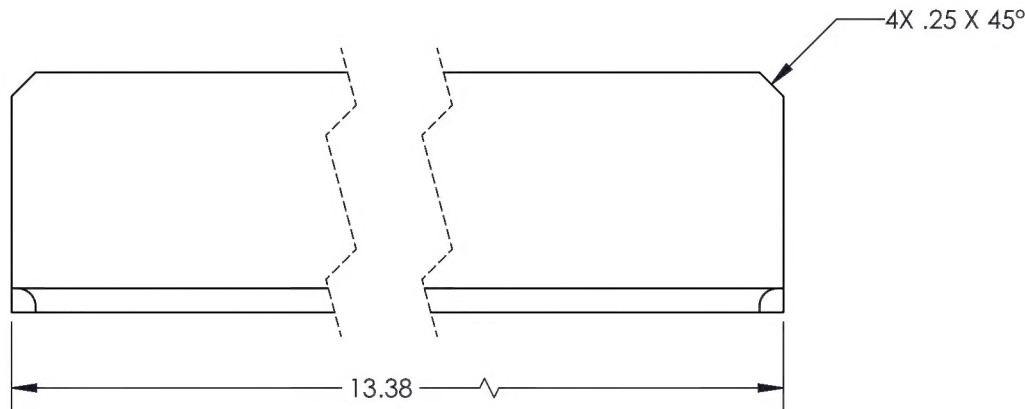
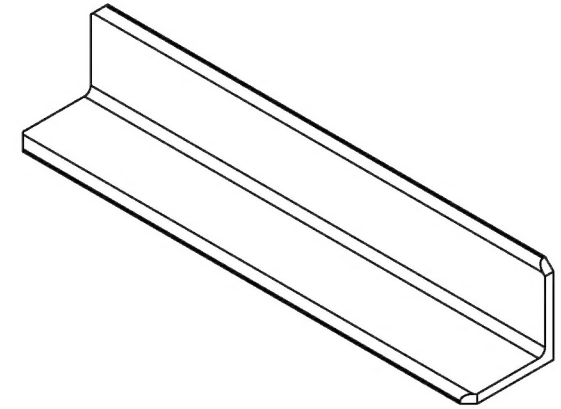


(-3)
ANGLE BAR

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-3	REV 1
MAT'L A36/1018/1020 HR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
HEAT TREAT	.XXX ± .010 FRACTIONS ± 1/8
FINISH SEE -1	.XX ± .03 ANGLES ± 1°
SPEC	.X ± .1 SURFACES = 125° ✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	H175
SCALE 1:2	DATE 6/20/2016
SHEET 3 OF 15	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS							
REV	ECR	DESCRIPTION			DATE	INITIAL	APPROVED

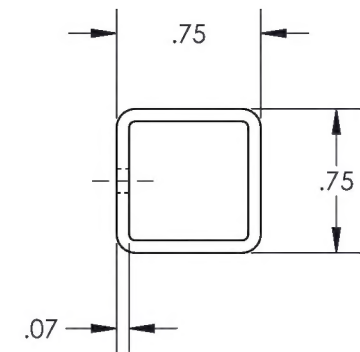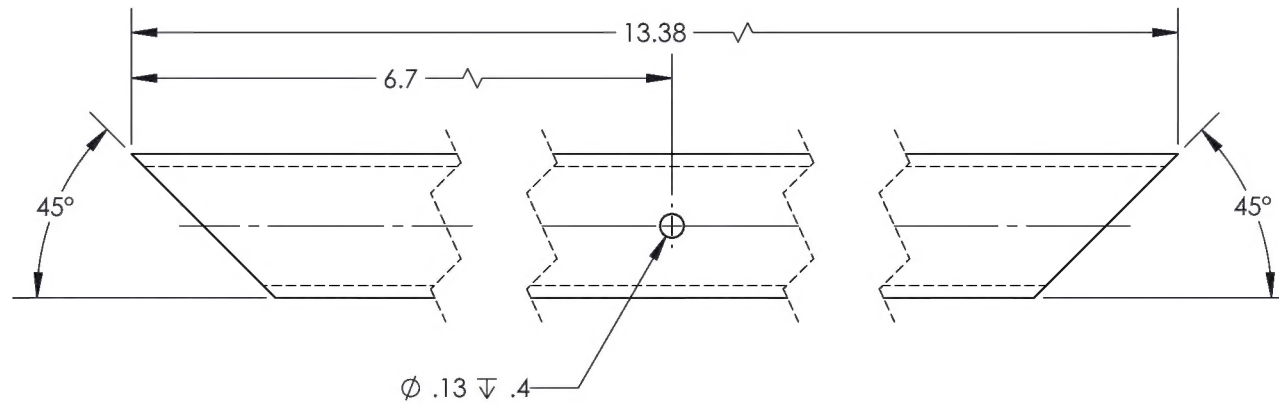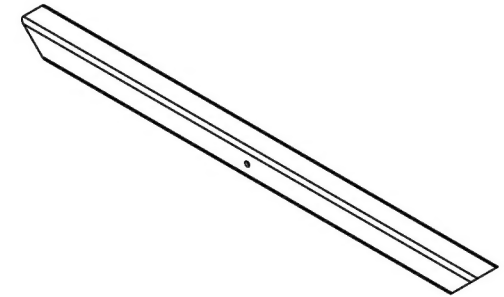





(-5)

LONG TUBE

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-5	REV 1
MAT'L STEEL TUBE	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .010 FRACTIONS ± 1/8
SPEC	.XX ± .03 ANGLES ± 1°
	.X ± .1 SURFACES = 125
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 1:1	DATE 6/20/2016
	SHEET 4 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

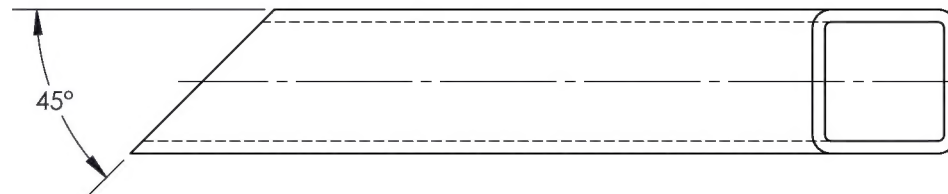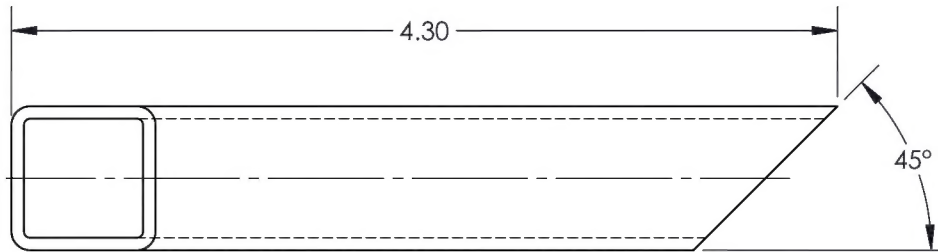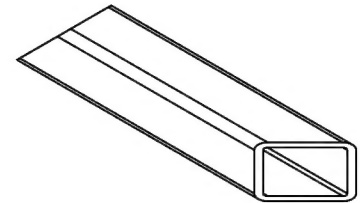





(7)

RIGHT SIDE TUBE

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-7	REV 1
MAT'L STEEL TUBE TREAT FINISH SEE -1 SPEC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .010 FRACTIONS ± 1/8 .XX ± .03 ANGLES ± 1° .X ± .1 SURFACES = 125 ✓	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: DUERFELDT	USED ON MODEL
CHECKED: CLOUGH	H175
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
SCALE 1:1	DATE 6/20/2016
SHEET 5 OF 15	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS						
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED	

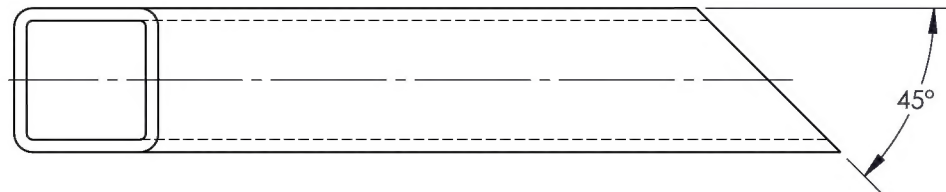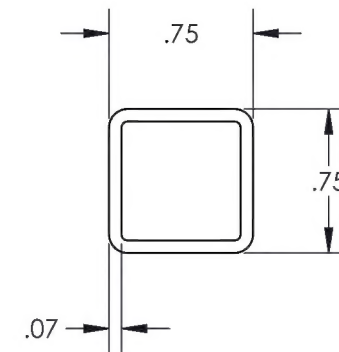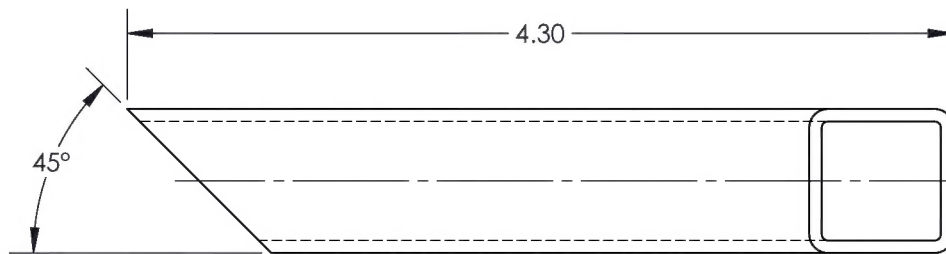




(-9)

LEFT SIDE TUBE

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-9	REV 1
MAT'L STEEL TUBE	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .010 FRACTIONS ± 1/8
SPEC	.XX ± .03 ANGLES ± 1°
	.X ± .1 SURFACES = 125/✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 1:1	DATE 6/20/2016
	SHEET 6 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

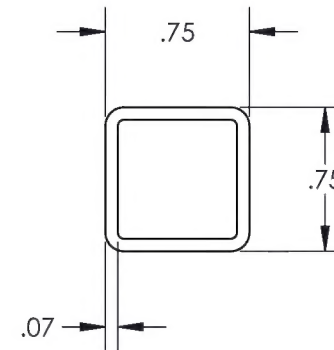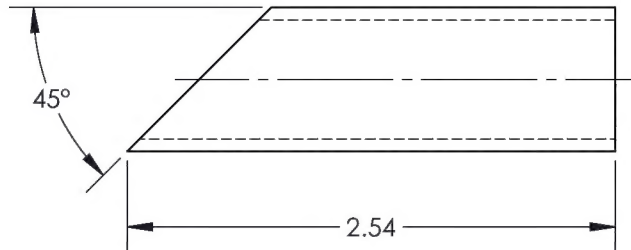




(-11)

UPRIGHT ANGLED

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-11	REV 1
MAT'L STEEL TUBE	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .010 FRACTIONS ± 1/8
SPEC	.XX ± .03 ANGLES ± 1°
	.X ± .1 SURFACES = 125° ✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 1:1	DATE 6/20/2016
	SHEET 7 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

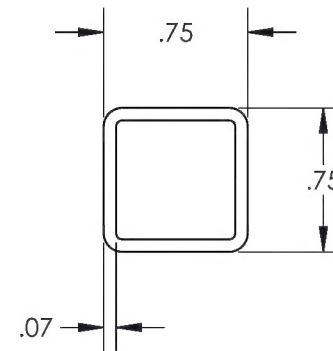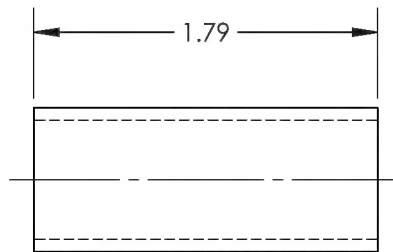



(13)

UPRIGHT SQUARE

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-13	REV 1
MAT'L STEEL TUBE	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .010 FRACTIONS ± 1/8
SPEC	.XX ± .03 ANGLES ± 1°
	.X ± .1 SURFACES = 125° ✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 1:1	DATE 6/20/2016
	SHEET 8 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS			
REV	ECR	DESCRIPTION	DATE
			INITIAL
			APPROVED

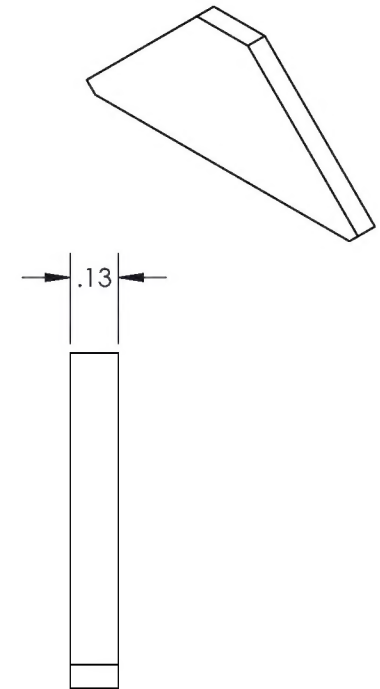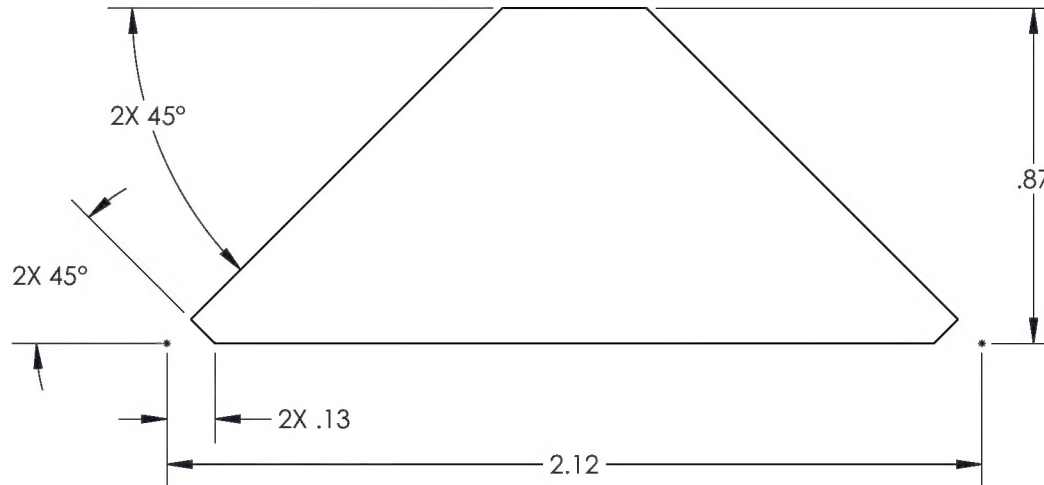


(15)
GUSSET

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-15	REV 1
MAT'L A36/1018/1020 HR	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .010 FRACTIONS ± 1/8
SPEC	.XX ± .03 ANGLES ± 1°
	.X ± .1 SURFACES = 125°
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 2:1	DATE 6/20/2016
	SHEET 9 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS			
REV	ECR	DESCRIPTION	
DATE	INITIAL	APPROVED	

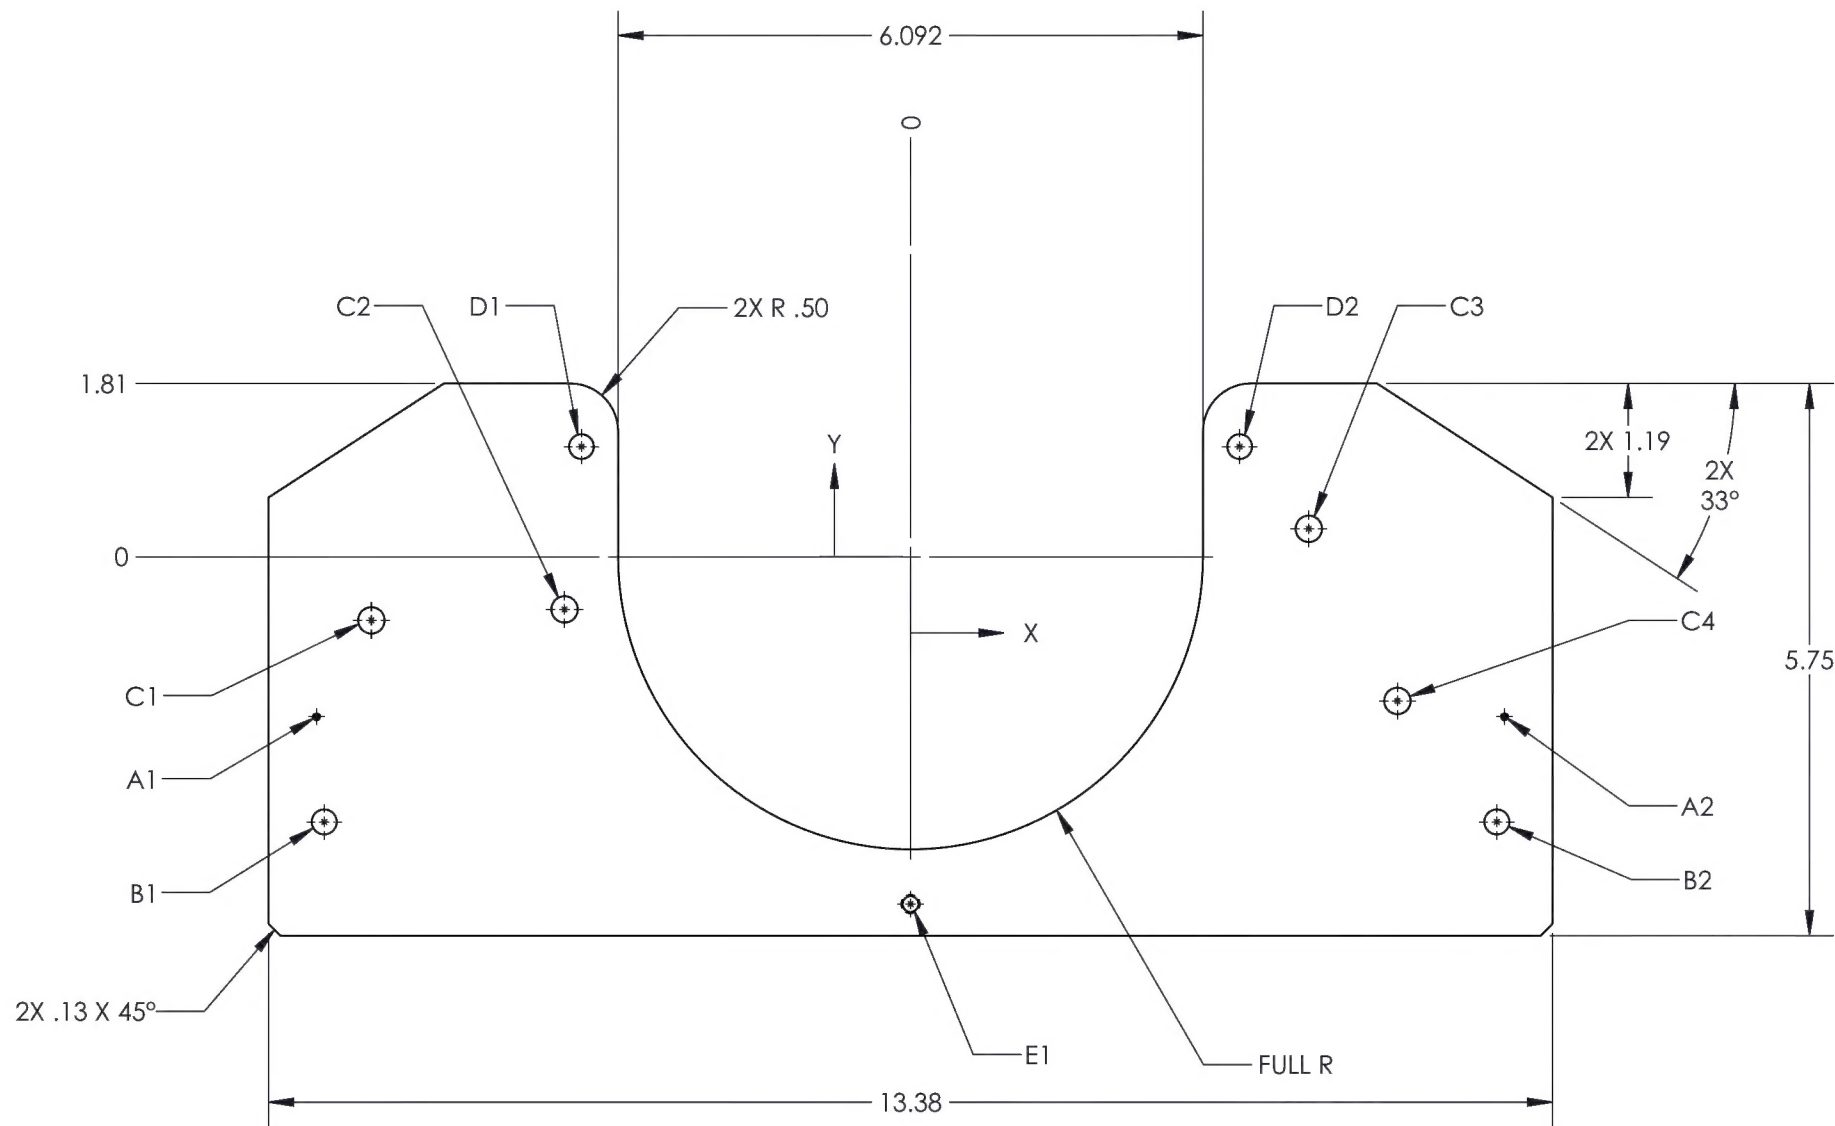






TAG	X LOC	Y LOC	SIZE
A1	-6.19	-1.66	M2X0.4 - 6H THRU ALL
A2	6.19	-1.66	
B1	-6.108	-2.760	$\phi .261^{+.005}_{-.000}$ THRU ALL
B2	6.108	-2.760	
C1	-5.616	-.662	$\phi .276$ THRU ALL
C2	-3.604	-.547	
C3	4.149	.291	
C4	5.072	-1.500	
D1	-3.428	1.147	$\phi .258^{+.005}_{-.000}$ THRU ALL
D2	3.428	1.147	
E1	.000	-3.615	M5X0.8 - 6H THRU ALL

(-17)
MAIN PLATE

DART AEROSPACE			
TITLE EXTINGUISHING BOTTLE SUPPORT			
DWG NO. RBEM262V3000101-17			REV 1
MAT'L A36/1018/1020 HR		UNLESS OTHERWISE SPECIFIED	
HEAT TREAT		DIMENSIONS ARE IN INCHES	
FINISH SEE -1		.XXX \pm .005 FRACTIONS \pm 1/8	
SPEC		.XX \pm .01 ANGLES \pm 5°	
DRAWN BY: DUERFELDT		.X \pm .1 SURFACES = 125/	
CHECKED: CLOUGH		1. BREAK ALL SHARP EDGES	
OPPS APPR: ANDERSON		.015 x 45° OR .015R	
QA APPR: LINDSAY		2. DIMENSIONAL LIMITS APPLY	
APPROVED: GILBERT		AFTER PLATING	
SCALE 1:2		3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DATE 6/20/2016		USED ON MODEL	
SHEET 10 OF 15		H175	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS			
REV	ECR	DESCRIPTION	DATE
			INITIAL
			APPROVED

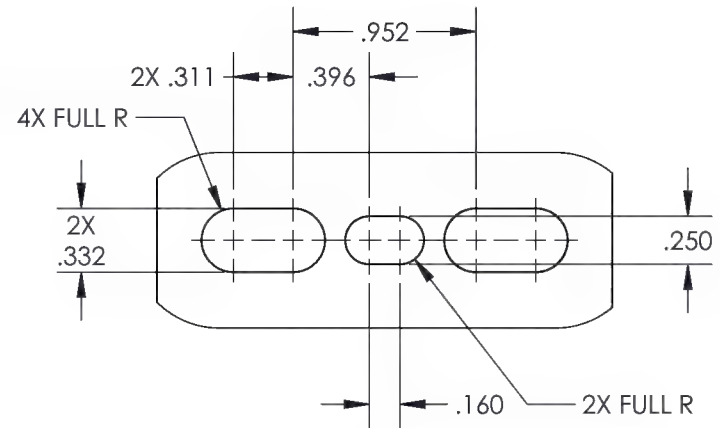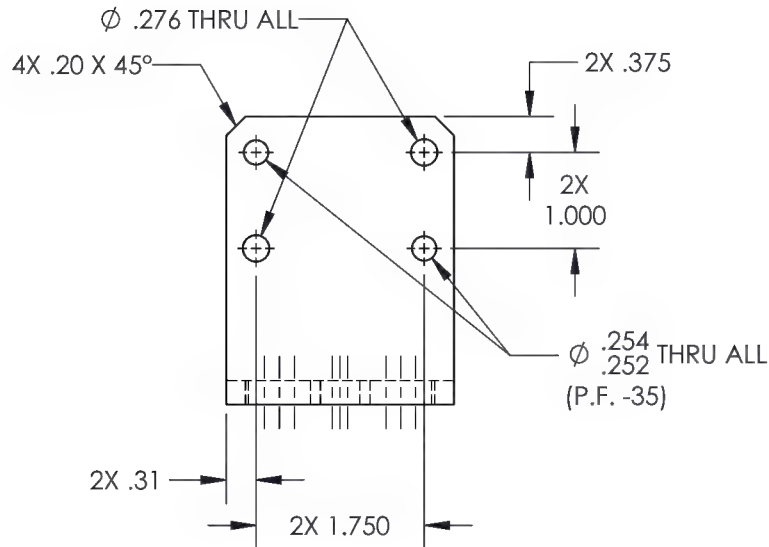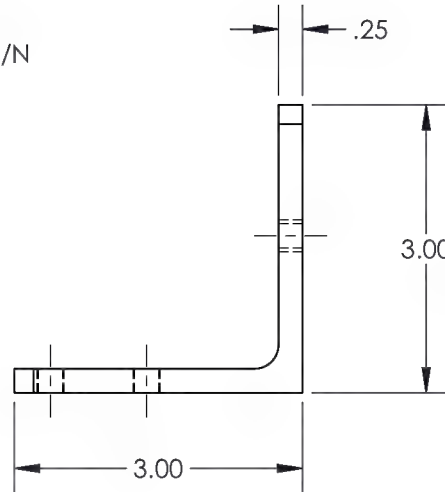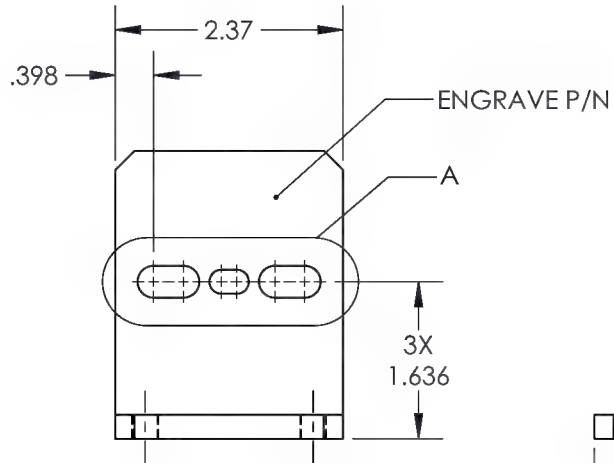

DETAIL A
SCALE 1 : 1



(19)

ANGLE BRACKET

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-19	REV 1
MAT'L A36/1018/1020 HR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
HEAT TREAT	.XXX ± .010 FRACTIONS ± 1/8
FINISH ZINC PLATE	.XX ± .03 ANGLES ± 1°
SPEC ASTM B633 TYPE I SC 2	.X ± .1 SURFACES = 125°
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	H175
SCALE 1:2	DATE 6/20/2016
SHEET 11 OF 15	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS			
REV	ECR	DESCRIPTION	DATE
			INITIAL
			APPROVED



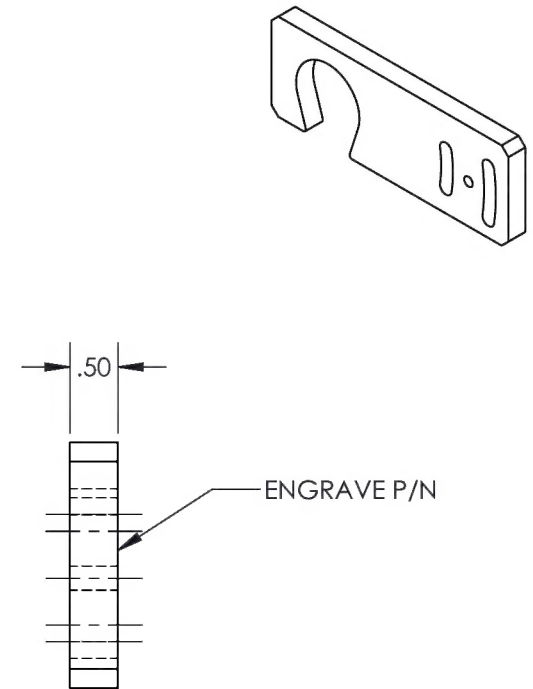
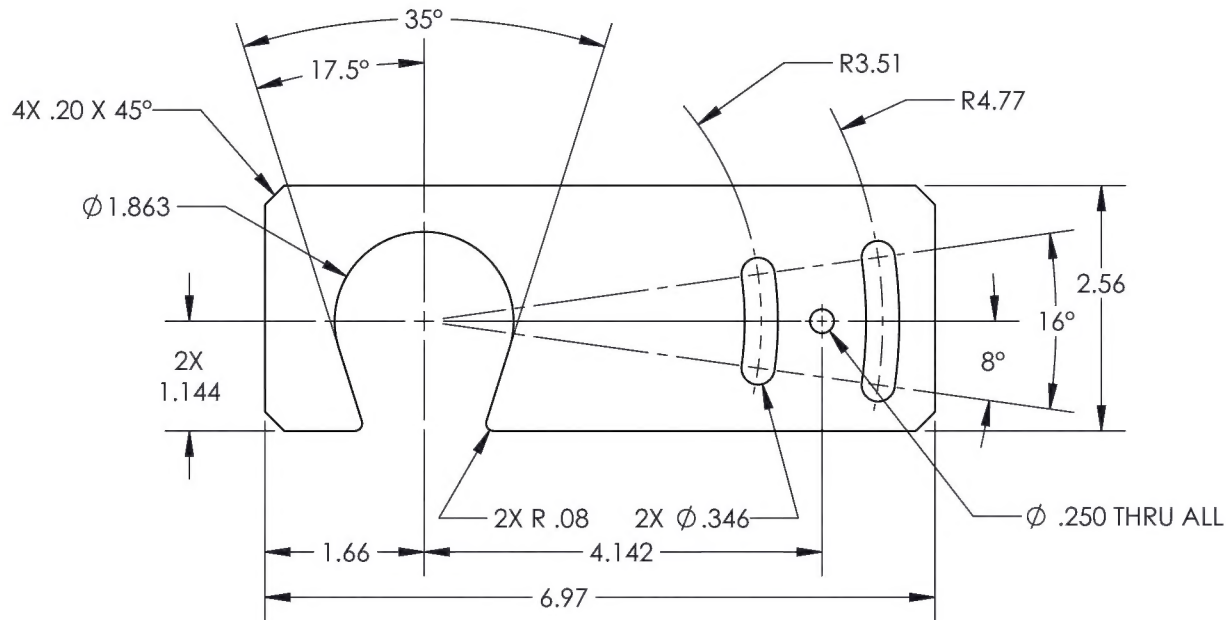


(21)
PLATE

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-21	REV 1
MAT'L 6061	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH CLEAR ANODIZE	.XXX ± .005 FRACTIONS ± 1/8
SPEC MIL-A-8625F, TYPE II, CLASS I	.XX ± .01 ANGLES ± .5°
DRAWN BY: DUERFELDT	.X ± .1 SURFACES = 125°
CHECKED: CLOUGH	1. BREAK ALL SHARP EDGES
OPPS APPR: ANDERSON	.015 x 45° OR .015R
QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY
APPROVED: GILBERT	AFTER PLATING
	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 1:2	DATE 6/20/2016
	SHEET 12 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

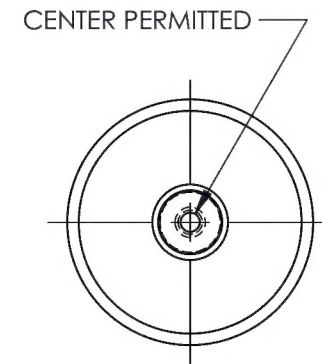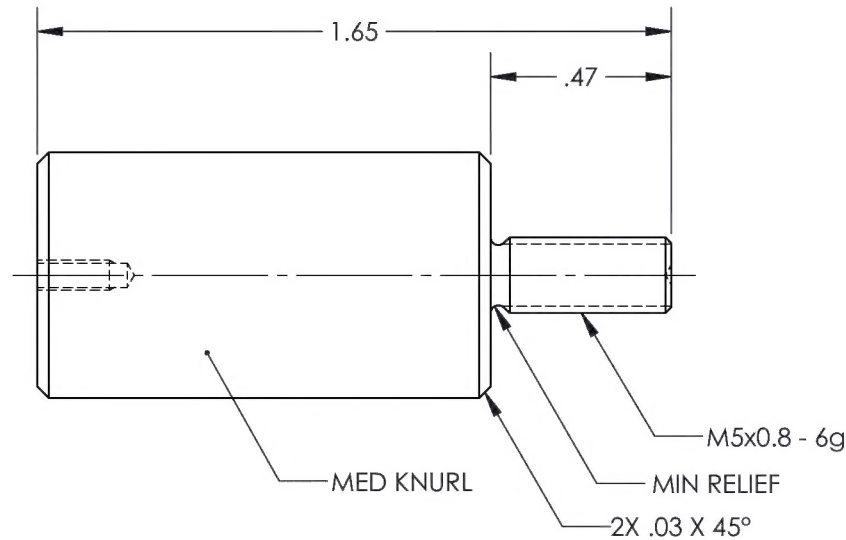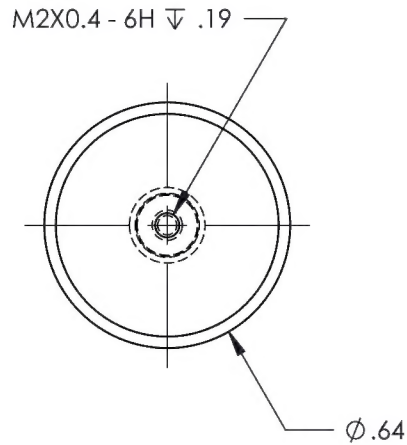


(-23)

SHORT THUMB SCREW

DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-23	REV 1
MAT'L 4140/4142	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH ZINC PLATE	.XXX \pm .005 FRACTIONS \pm 1/8
SPEC ASTM B633 TYPE I SC 2	.XX \pm .01 ANGLES \pm 5°
DRAWN BY: DUERFELDT	.X \pm .1 SURFACES = 125°
CHECKED: CLOUGH	1. BREAK ALL SHARP EDGES
OPPS APPR: ANDERSON	.015 x 45° OR .015R
QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY
APPROVED: GILBERT	AFTER PLATING
	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 2:1	DATE 6/20/2016
	SHEET 13 OF 15

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS						
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED	

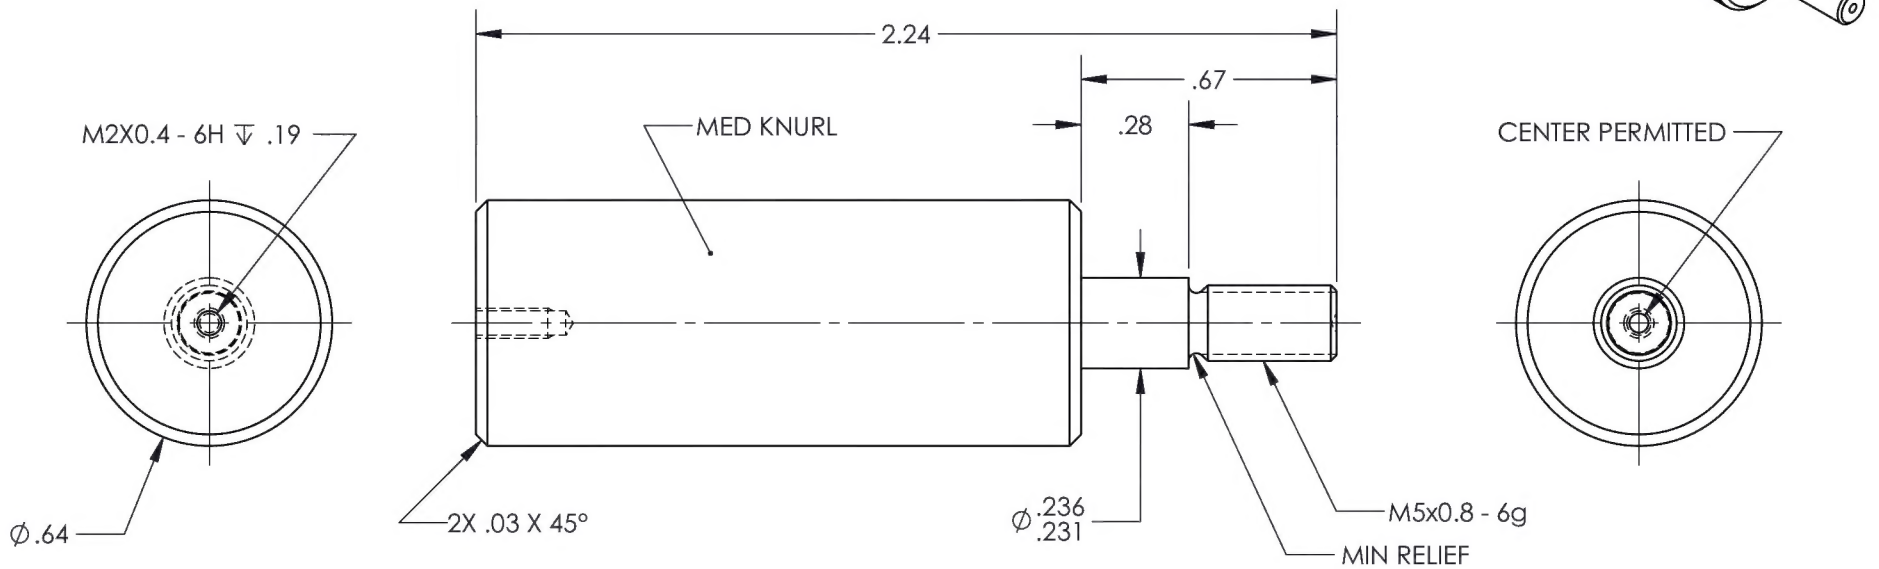



DART AEROSPACE	
TITLE EXTINGUISHING BOTTLE SUPPORT	
DWG NO. RBEM262V3000101-25	REV 1
MAT'L 4140/4142	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
HEAT TREAT	.XXX ± .005 FRACTIONS ± 1/8
FINISH ZINC PLATE	.XX ± .01 ANGLES ± 5°
SPEC ASTM B633 TYPE I SC 2	.X ± .1 SURFACES = 125
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	H175
SCALE 2:1	DATE 6/20/2016
SHEET 14 OF 15	

(-25)

LONG THUMB SCREW

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

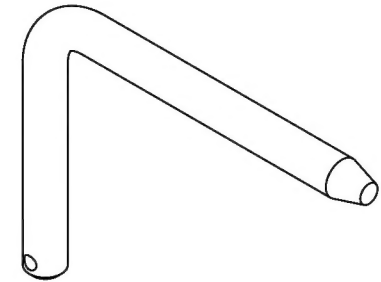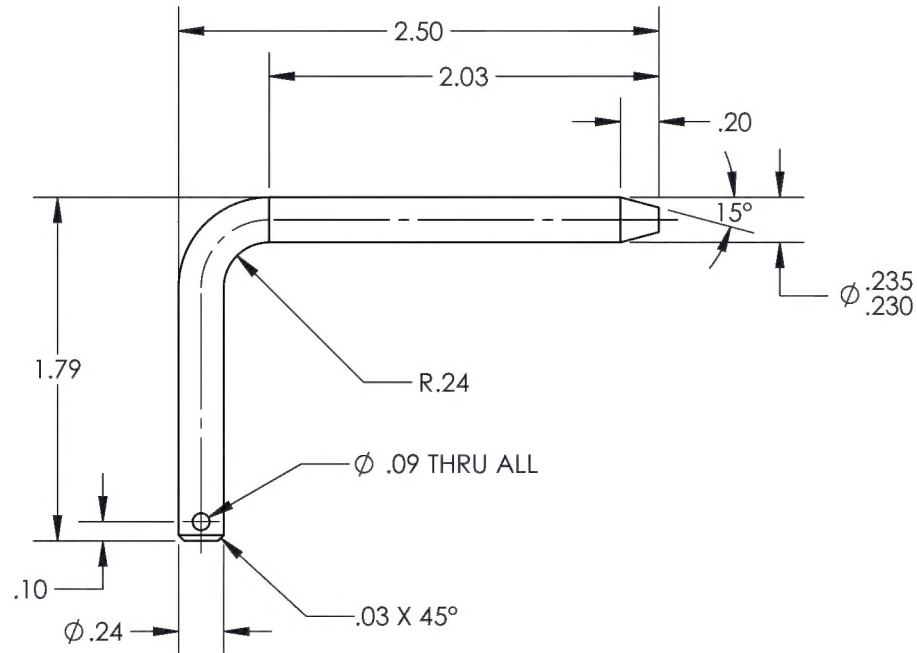

(-27)

BENT HANDLE PIN



TITLE
EXTINGUISHING BOTTLE SUPPORT

DWG NO. RBEM262V3000101-27 REV 1

MAT'L 1018/1020 CR		UNLESS OTHERWISE SPECIFIED	
TREAT		DIMENSIONS ARE IN INCHES	
FINISH BLACK OXIDE		.XXX ± .010 FRACTIONS ± 1/8	
SPEC QMSI-6.2.2, B.O. REV D		.XX ± .03 ANGLES ± 1°	
DRAWN BY: DUERFELDT		.X ± .1 SURFACES = 125	
CHECKED: CLOUGH		1. BREAK ALL SHARP EDGES	
OPPS APPR: ANDERSON		.015 x 45° OR .015R	
QA APPR: LINDSAY		2. DIMENSIONAL LIMITS APPLY	
APPROVED: GILBERT		AFTER PLATING	
SCALE 1:1		3. INTERPRET DIM AND TOL PER	
DATE 6/20/2016		ASME Y14.5M-2009	
SHEET 15 OF 15		USED ON MODEL	
		H175	